




Construction and Feature

- Capable of switch electric circuit with load
- Adaptable to padlock device
- Contact position indication
- Capable of quickly releasing stored energy operation
- Highlighted of high making and breaking capacity
- High short-circuit current withstand capacity
- Used as main switch for household and similar installation

Technical Data

- Pole No.: 1, 2, 3, 4
- Rated current(A): 63, 80, 100, 125
- Rated voltage: AC 230/400V
- Rated frequency: 50/60Hz
- Rated short-circuit making capacity: 6kA
- Rated withstand current: 2kA within 1sec
- Electro-mechanical endurance: 10000 cycles
- Connection capacity: Rigid conductor 35mm²
- Connection terminal:
 - Screw terminal
 - Pillar terminal with clamp
- Installation:
 - On symmetrical din rail 35mm
 - Panel mounting
- Terminal Connection Height: H=19mm

Wiring Diagram

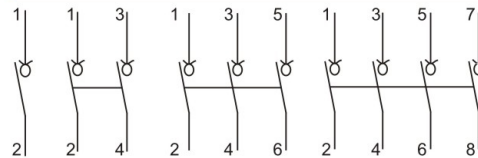

Overall & Installation Dimensions

